

HOLLYMATIC 3000 MIXER/GRINDER



Gemini Systems

IT'S PERFECT. THE HOLLYMATIC 3000 MIXER/GRINDER FILLS THE GAP BETWEEN TOO BIG AND TOO SMALL.

If your operation is somewhere between a supermarket and a large industrial processor...the Hollymatic 3000 Mixer/Grinder is perfect for you. Output rates can exceed 5,940 lb/hr, with a second cut output rate of up to 65 lb/min through a 1/8" plate (depending on product). Solidly constructed of heavy gauge stainless steel with seam welded corners throughout, the Hollymatic 3000 offers smooth, easy to clean surfaces.

The removable stainless steel mixing arm offers an efficient mix and dispersion of the product and is programmed with an automatic forward-reverse duty cycle. The feed screw channel empties fully without squashing or pulping the product.


Stainless steel feed screw, grinding head and adapter ring are standard. Pneumatic foot control is available to assist in filling trays for display. Powered by two independent gear reduction units, the Hollymatic 3000 delivers quiet and continuous, trouble free operation. For more information contact Hollymatic or your local Hollymatic Dealer today. Hollymatic Corporation, 600 E. Plainfield, Road, Countryside IL 60525. Telephone: 708/579-3700; Fax: 708/579-1057; Web Address: www.hollymatic.com.



Hollymatic.

YOUR PRICE VALUE LEADER™

HOLLYMATIC 3000 MIXER/GRINDER

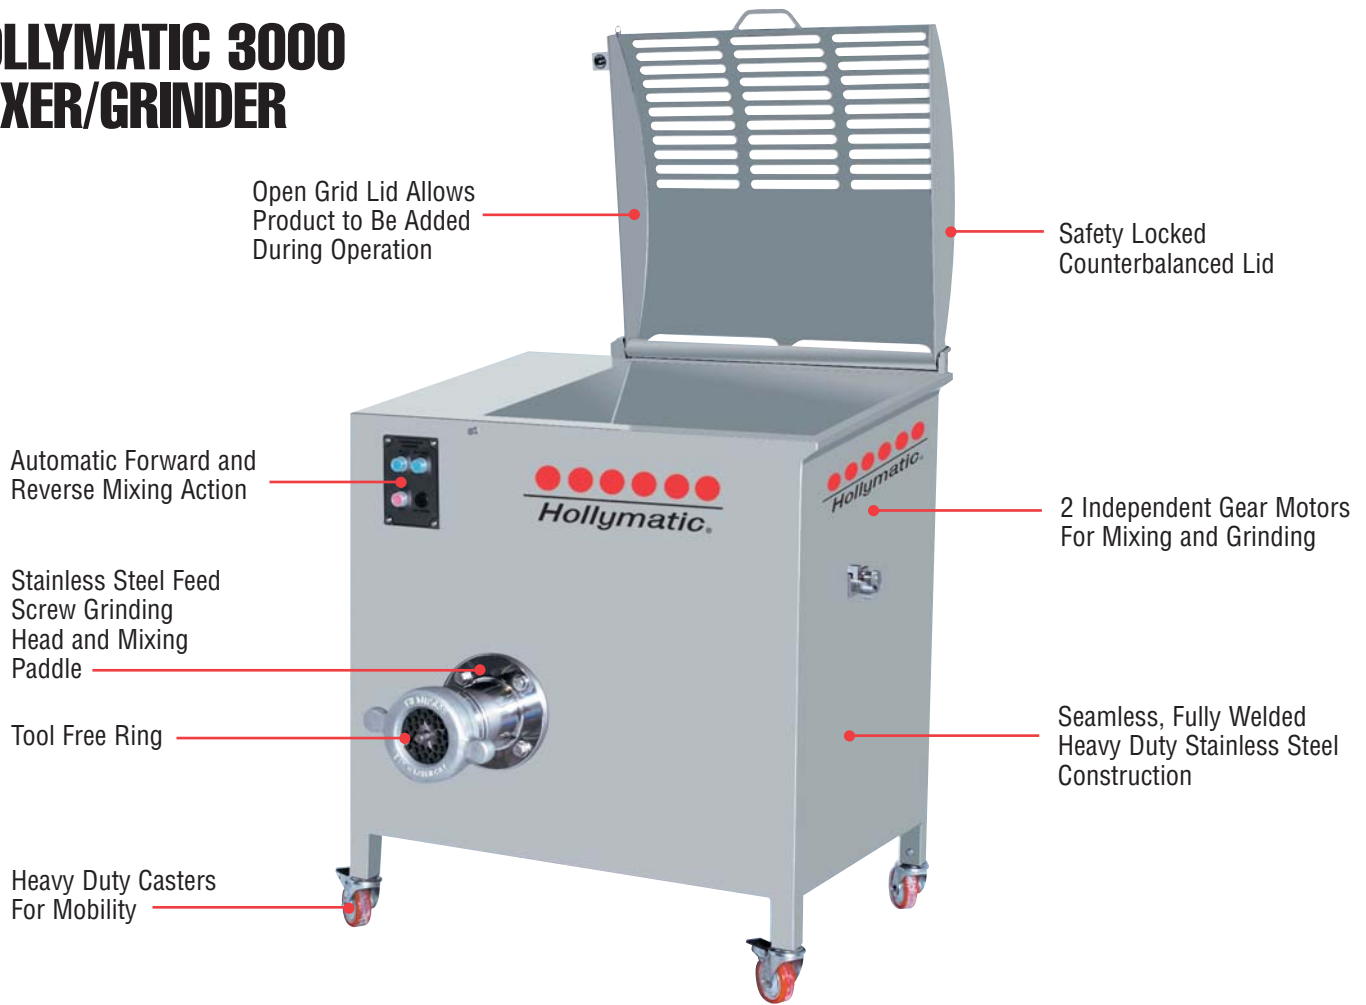

Open Grid Lid Allows Product to Be Added During Operation

Safety Locked Counterbalanced Lid

Automatic Forward and Reverse Mixing Action

2 Independent Gear Motors For Mixing and Grinding

Stainless Steel Feed Screw Grinding Head and Mixing Paddle

Seamless, Fully Welded Heavy Duty Stainless Steel Construction

Tool Free Ring



Heavy Duty Casters For Mobility

HOLLYMATIC 3000 SPECIFICATIONS

Hopper Capacity:	300 pounds
Grinding Head Size:	52 (5-1/8")
Production Capacity:	Up to 65 lb/min. (Second Cut) (depending on product & plate size)
Gear Motor (Mincing):	12HP
Gear Motor (Mixing):	1.5HP
Standard Voltage:	200V. or 230V., 60Hz., 3ph. 36A
Net Weight:	880 lbs.

OPTIONS FOR 3000

- Footswitch
- Gemini connections to allow for continuous 1st and 2nd grind production.

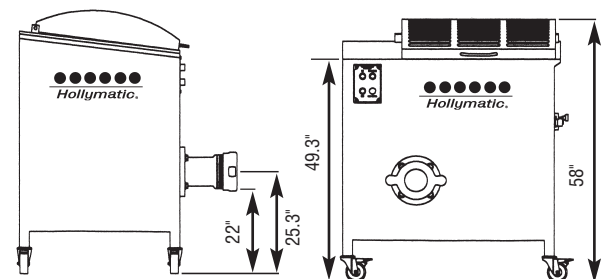

HOLLYMATIC WARRANTY
Twelve (12) months from date of purchase. Refer to warranty certificate for terms and conditions

Hollymatic Corporation,
600 E. Plainfield Road, Countryside, Illinois 60525
708/579-3700 Fax: 708/579-1057
Web Site: www.hollymatic.com



Hollymatic

YOUR PRICE VALUE LEADER™